

# EH-VS ARTIST

## Recessed LED downlight

LED |



### Installation Instructions

#### Technical data:

- Input: 220-240Vac 50-60Hz.
- IP20/54
- Electrical protection class: Class II



For illustration only

**Disconnect mains power before installation.**



### Important:

This light fixture is classified as electrical & electronic waste (WEEE). Once ceased operation It is mandatory to destroy it according to your local waste directives.


### Warning:

1. Connecting this light fixture to mains will be conducted only by qualified and licensed electrician. It is mandatory to disconnect mains supply prior to installation or service.
2. Replace any broken protective cover.
3. This light fixture is designed for indoor installation, according to listed IP level.
4. The usage of non-complying dimming devices for low voltage systems may damage the power supply device.
5. The light fixture must not be covered by any isolation material.


### Maintenance:

1. Use only a soft antistatic wipe to clean the diffuser.
2. In case of a fault, do not try to fix it on your own. Uninstall the light fixture and contact your nearest official service station.
3. To not use Alcohol, detergents, chemical and such to clean the light fixture.
4. The light unit source is non-replaceable.

### Electrical wiring scheme:

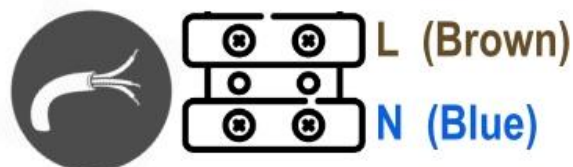

### Installation instructions:

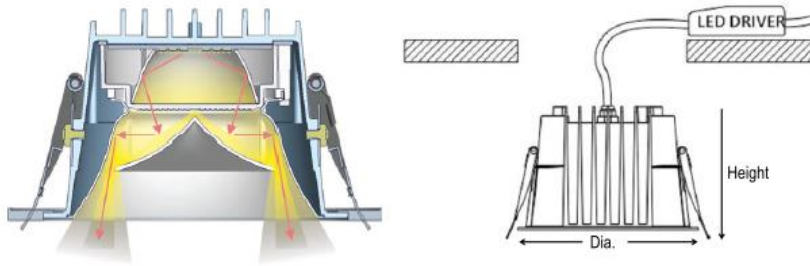


### Recessed installation:

1. This luminaire is designed for recessed installation on gypsum, metal or wood ceilings.
2. Cut open a hole in your ceiling fitting the luminaire's dimensions according to the specific model.

Power (W)	CCT	Height*Diameter (mm)	Cut out (mm)	Luminaire's Lumen output (lm)
6	4000K	65*87	75	480
10	4000K	75*110	100	1000
15	4000K	135*95	125	1500
20	4000K	186*121	175	2000
25	4000K	160*109	150	2500
36	4000K	186*121	175	3600

3. Insert the luminaire into the open cut, bending the support springs to the upper position prior the inserting. Once inserted, the springs will hold the luminaire into place.
4. Do not cover the luminaire by any insulating material.
5. Connect the light fixture to the power supply, according to the wiring scheme.
6. Light fixture is ready for operation.



We hold our rights to change and update technical data on luminaires without prior notice. Although all efforts conducted in accessibility of data, inaccuracies and/or typographical errors may occur. Instructions are worded in the masculine language for convenience only, and refer to all genders. Warranty is valid according to the enlisted data on our website, and/or as listed on client quotation by our local representative.