




Recessed back-light LED panel, designed for suspended ceiling installation, designed according to leading international standards and requirements.

EXPERT's slim structure, clean design and glare reduction technology where each LED is equipped with a PMMA lens, allows uniform dispersion of light, giving it a professional appearance. It also improves heat management in the fixture body which contributes to extending its lifespan. EXPERT's long lifespan and other protections are achieved thanks to Vossloh-Schwabe's Ripple<1% (Flicker-Free) LED driver.

Suitable for installation in offices, schools, public institutions, clinics and hospitals and more.

Technical specifications:

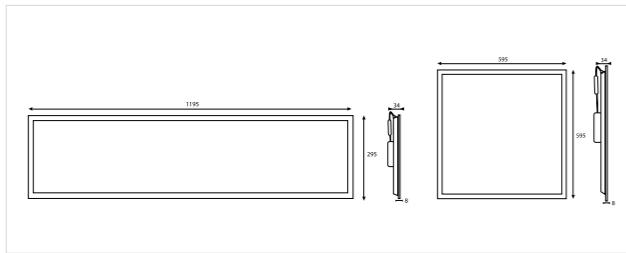

Material: Formed Aluminum Body. PMMA Lens.
Diffuser: Prismatic.
Body Colour: ○
Power: Adj. Power 33W-41W
Ingress Protection Rating: IP20
CCT: 3000K / 4000K
Mounting Type: Recessed /
 Ceiling Surface (with accessory)

Power (W)	CCT	Height×Width×Length (mm)	Diffuser	Luminaire's Lumen Output (lm)
36	4000K	34×595×595	Prismatic	3,600
36	4000K	34×595×595	Prismatic	4,320
36	4000K	34×295×1195	Prismatic	3,600
36	4000K	34×295×1195	Prismatic	4,320


* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. ** Tolerance: +-10%.

Accessories:



Surface Mounting Kit

Photometric Curves:



EH-VS EXPERT.



220-240V 50-60 Hz PF>95% ta=-20-+45° IP20 FLICKER FREE THD<6% UGR<19 CRI>85 L80₂ 102,000 Hours LM80 CB [Icon]