




An extremely durable waterproof professional luminaire, according to leading international standards and requirements. PROFESSIONAL's white base and a wide structure contribute to its reduced glare. The fixture's has high ingress protection (IP65) and high impact protection (IK10). It utilizes a Vossloh-Schwabe Ripple<3% and THD>5% LED driver, and is available in several sizes and power supply options.

For lighting underground parking lots, sheds, warehouses, production halls, garages, shops and mor.

**Technical specifications:**

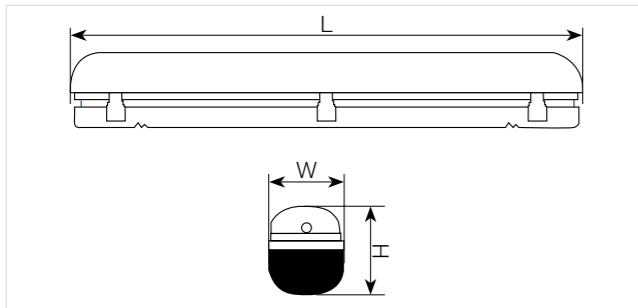


**Material:** White Injection Moulded PC Base.  
Stainless Steel Clips.  
**Diffuser:** PC  
**Body Colour:** ○  
**Power:** 20W / 36W / 60W  
**Ingress Protection Rating:** IP65  
**Impact Protection Rating:** IK10  
**CCT:** 4000K  
**Mounting Type:** Surface Mounted  
Dimming available by special order.

Power (W)	CCT	Length*Height*Width (mm)	Luminaire's Lumen Output (lm)
20	4000K	675*88*132	2,100
36	4000K	1278*88*132	4,500
60	4000K	1565*88*132	8,400


\* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. \*\* Tolerance: +-10%.

**Photometric Curves:**



EH-VS

# PROFESSIONAL.

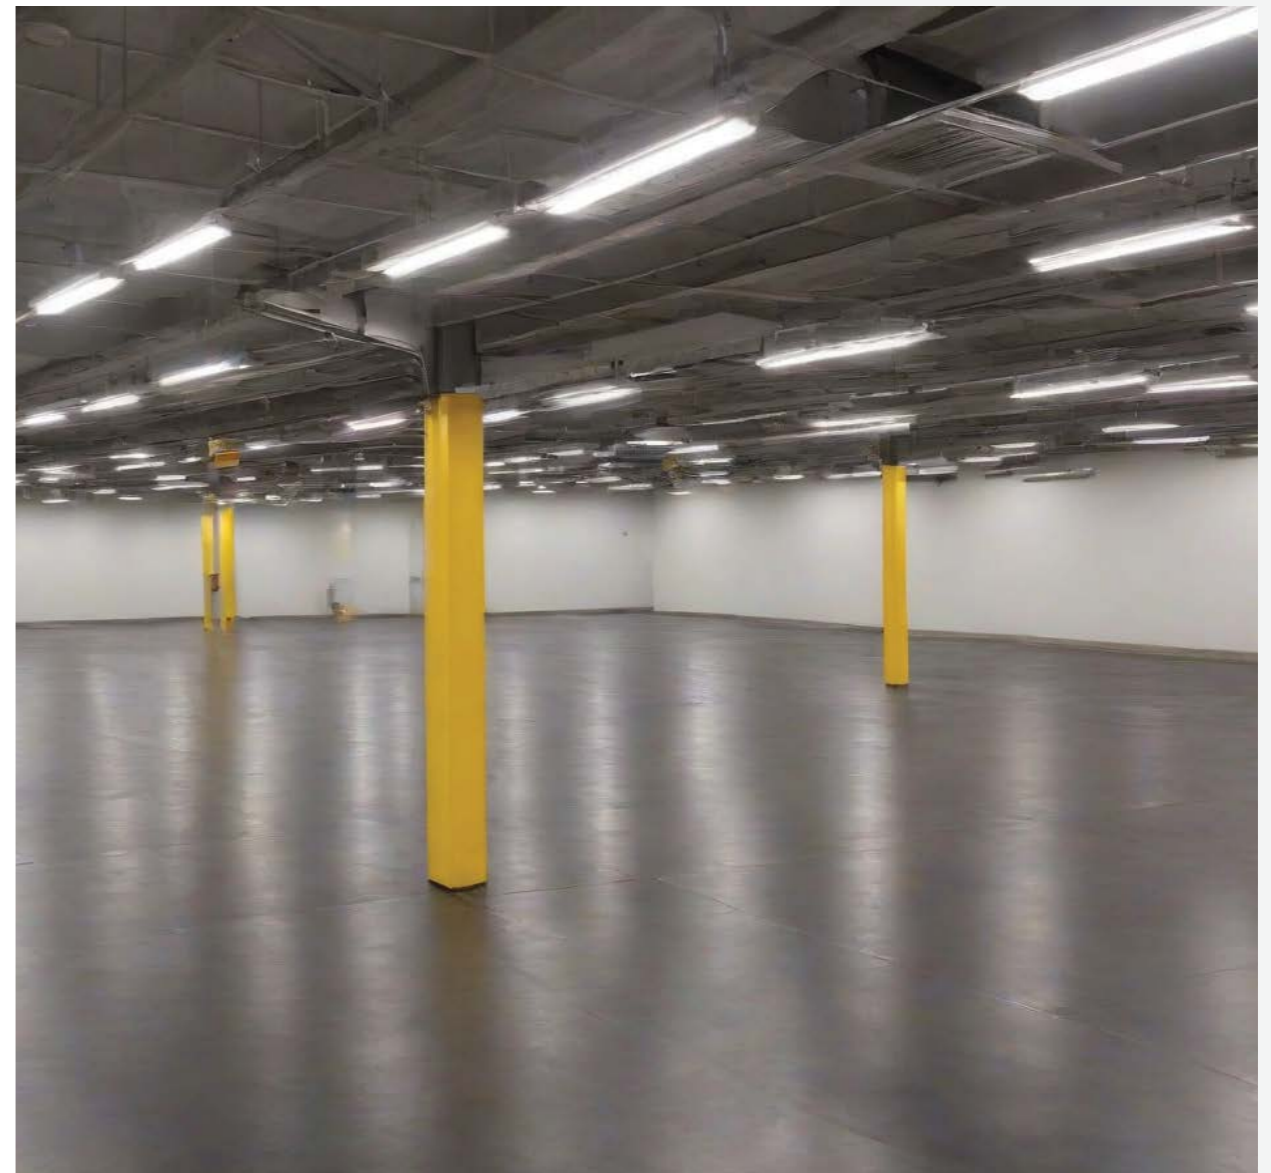

220-240V 50-60 Hz    PF>95%    ta=-20-40°C    IK10    IP65    FLICKER FREE    THD<5%    CRI>85    LM80    L80≥60,000 Hours    CB