


EH-VS EDGE

Recessed LED panel



An advanced LED panel, which combines a clean and aesthetic design with quality lighting. EDGE adjustable CCT by switch (3000K, 3500K, 4000K) and adjustable power (24-39W), offering versatility for various applications. It excels in extremely low glare (UGR<19), providing ideal comfort for work environments and offices. A reliable and cost-effective quality choice over time, it is especially suitable for use in offices, hospitals, workstations, and places that require precise and uniform lighting

Technical specifications:

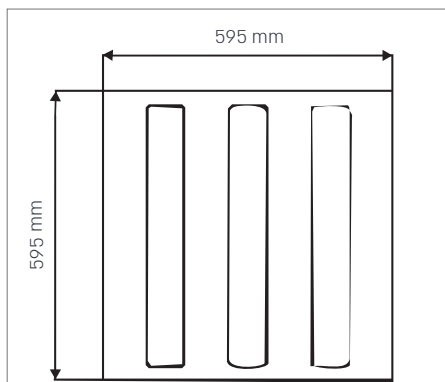

Material: galvanized metal

Leds: OSRAM/PHILIPS Or equivalent

Driver: Vossloh Schwabe

Optic: 88°

CRI: 90

Power: adjustable power 24W - 39W

Features adjustable CCT by switch : 3000K, 3500K, 4000K


Ingress protection rating: IP20

Impact protection rating: IK05

Power (W)	CCT	Dimensions (mm)	Luminous Efficacy (lm)	Light Output (lm/w)	model
Adj.24-39	4000K	595*595*50	3335-4600	115	EDGE DALI
Adj.24-39	4000K	595*595*50	3335-4600	115	EDGE ON/OFF

* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. ** Tolerance: +-10%

Photometric curves:

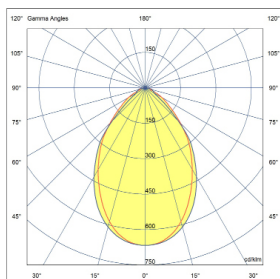

220-240V
50-60 Hz

ta=
-20~+45°

IP20

FLICKER
FREE

UGR<19

RG0

CRI 90

IK05

5
years of
warranty

CE

