



# PURELIGHT

Decorative LED panel

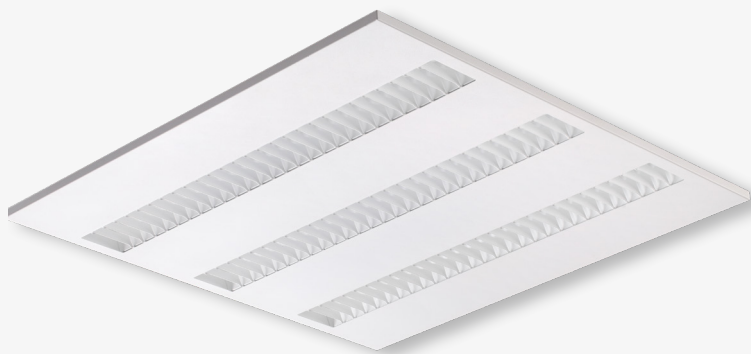

A perfect lighting solution for modern spaces, combining a minimalist design with excellent performance. PURELIGHT features adjustable CCT by switch (3000K, 3500K, 4000K) and adjustable power (24-38W), offering flexibility to suit various needs. Its extremely low glare (UGR<19) guarantees maximum comfort and makes it specially adapted for work environments, offices, and living spaces. Simple installation and durable design in diverse environmental conditions make it the ideal choice for any lighting project

## Technical specifications:

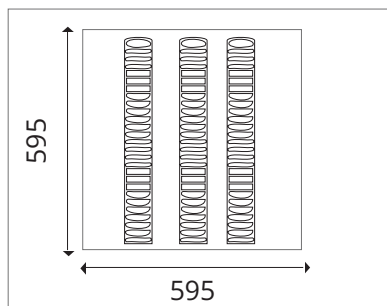

**Material:** Galvanized Steel with hypoxypolyester coating

**Leds:** OSRAM/PHILIPS Or equivalent

**Driver:** Vossloh Schwabe

**CRI:** 90

**Power:** adjustable power 24W - 38W

**features adjustable CCT by switch :** 3000K, 3500K, 4000K


**Ingress protection rating:** IP20

**Impact protection rating:** IK05

Power (W)	CCT	Dimensions (mm)	Light Output (lm)	Luminous Efficacy (lm/w)
Adj.24-38	4000K	595x595	3193-3313	105

\* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. \*\* Tolerance: +-10%

## Photometric curves:

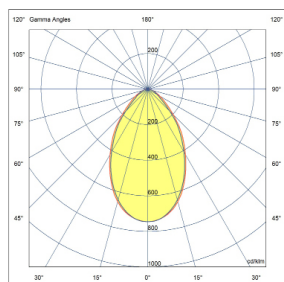

220-240V  
50-60 Hz

ta=  
-20~+45°

IP20

FLICKER  
FREE

UGR<19

RG0

CRI 90

IK05

5  
years of  
warranty

CE

