



LIGHTLINE BRAVE

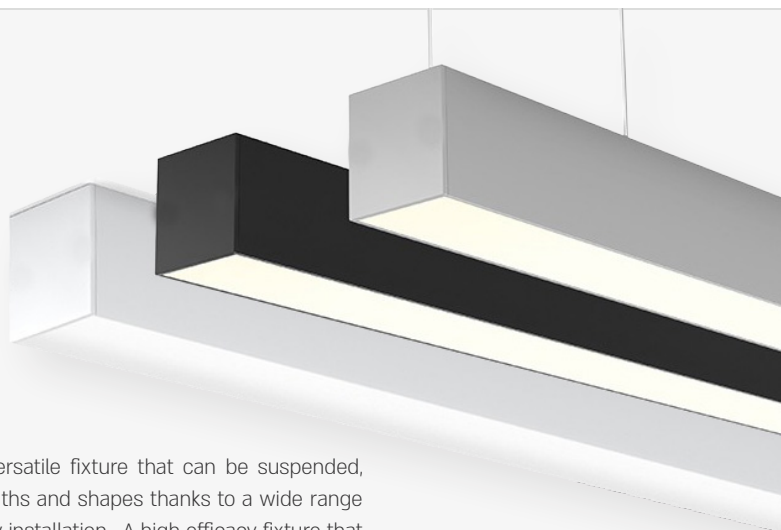

A compact 35x35 mm lighting profile. LightLine BRAVE is a versatile fixture that can be suspended, ceiling mounted, horizontally wall mounted, and in different lengths and shapes thanks to a wide range of connectors. Its unique structure and size allow quick and easy installation. A high efficacy fixture that comes in a variety of intensities and power supply options.

Suitable for installation in hotels, lobbies, public buildings, restaurants, villas and more.

Technical specifications:

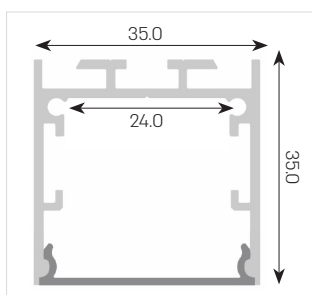

Material: Anodized Aluminium.

Diffuser: Opal / Prismatic.

Body Color: ● ○ ● Additional colours by special order.

Power: Up to 30W/m

CCT: 2700K / 3000K / 4000K

Mounting Type: Surface Mounted / Hanging

Max Length per Feed: Up to 5 m' for 15W/m model.
Up to 3 m' for 30W/m model.


Power (W)	CCT	Width*Height (mm)	Luminaire's Lumen Output (דפיוז) (lm)	Luminaire's Lumen Output (Opal) (lm)
15	4000K	35×35	1,000	800
25	4000K	35×35	1,700	1,350
30	4000K	35×35	2,700	1,620

* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. ** Tolerance: ±10%.

Various Accessories and Connectors Available:




Mounting Options:



Hanging Accessories:



Photometric Curves:



24v DC

PF>95%

ta= 35°C

IP40

UGR<19

CRI>90

TM21

LM80

CB

