



# LIGHTLINE CHARISMA

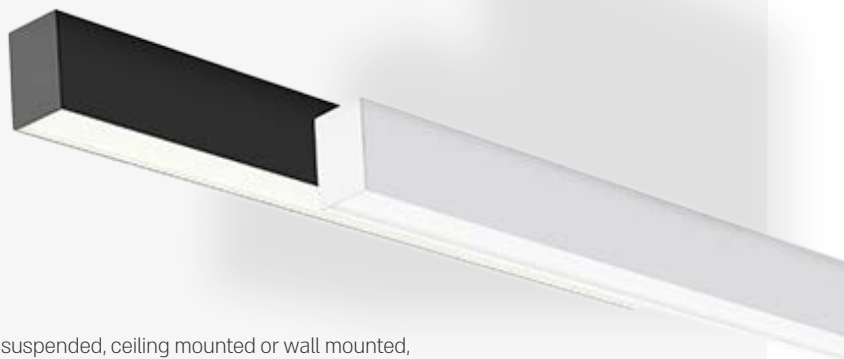

A well-designed external 50 x 75mm light-line profile, which can be suspended, ceiling mounted or wall mounted, including an up & down light dispersion option. LightLine CHARISMA's sleek design makes it the right choice for those looking for plenty of light and a lighting fixture with presence. A wide range of connectors allow to create different lengths and shapes. A removable tray allows easy and quick installation, and a choice between an external or internal LED driver. Suitable for hotels, lobbies, public buildings, offices, restaurants and more.

## Technical specifications:

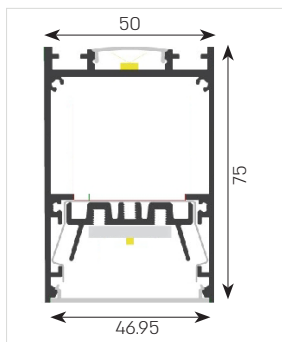

**Material:** Anodized Aluminium. Coated or Coloured by choice.

**Diffuser:** PMMA / PC

**Driver:** Vossloh-Schwabe.

**Body Color:** ● ○ ● Additional colours by special order.

**Optic:** Opal.

**Power:** Up to 30W/m

**CCT:** 2700K / 3000K / 4000K

**Mounting Type:** Ceiling mounted / Pendant / Wall mounted.


**Max Length per Feed:** Up to 5 m' for 15W/m model.

Up to 3 m' for 30W/m model.


Power (W)	CCT	Width×Height (mm)	Diffuser	Luminaire's Lumen Output (lm)
15	4000K	75×50	opal	810
25	4000K	75×50	opal	1,350
30	4000K	75×50	opal	1,610

\* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. \*\* Tolerance: +-10%.

## Photometric curves:



## Mounting Options:

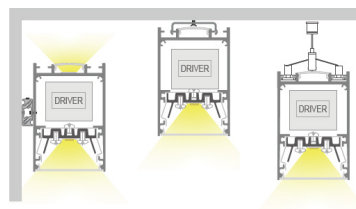

## Various Accessories and Connectors Available:



220-240V  
50-60 Hz

24v DC

PF>95%

ta=  
35°C

IP40

UGR<19

CRI>90

TM21

LM80

CB

