



LIGHTLINE CHARISMA

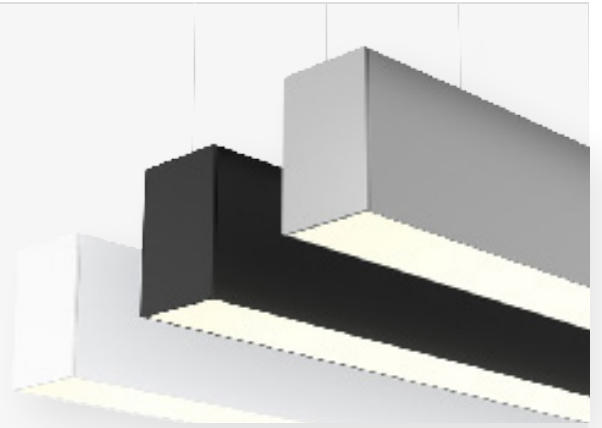

A well-designed external 50 x 75mm light-line profile, which can be suspended, ceiling mounted or wall mounted, including an up & down light dispersion option. LightLine CHARISMA's sleek design makes it the right choice for those looking for plenty of light and a lighting fixture with presence. A wide range of connectors allow to create different lengths and shapes. A removable tray allows easy and quick installation, and a choice between an external or internal LED driver. Suitable for hotels, lobbies, public buildings, offices, restaurants and more.

Technical specifications:

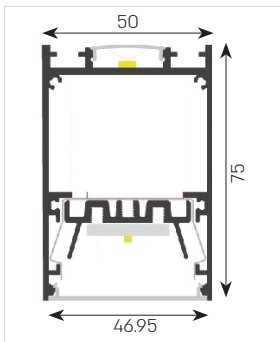


- Material:** Anodized Aluminium. Coated or Coloured by choice.
- Diffuser:** PMMA / PC
- Driver:** Vossloh-Schwabe.
- Body Color:** ● ○ ● Additional colours by special order.
- Optic:** Opal.
- Power:** Up to 30W/m
- CCT:** 2700K / 3000K / 4000K
- Mounting Type:** Ceiling mounted / Pendant / Wall mounted.
- Max Length per Feed:** Up to 5 m' for 15W/m model.
Up to 3 m' for 30W/m model.


Power (W)	CCT	Width×Height (mm)	Diffuser	Luminaire's Lumen Output (lm)
15	4000K	75×50	opal	810
25	4000K	75×50	opal	1,350
30	4000K	75×50	opal	1,610

* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. ** Tolerance: +-10%.


Photometric curves:



Mounting Options:

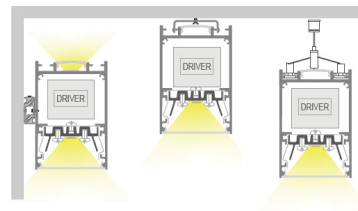

Various Accessories and Connectors Available:

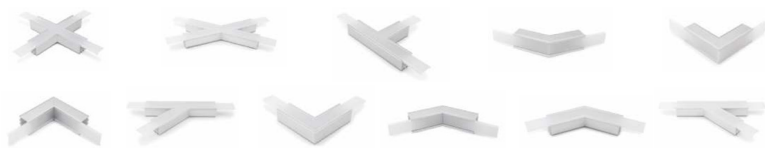

- 220-240V
50-60 Hz
- 24v DC
- PF>95%
- ta= 35°C
- IP40
- UGR<19
- CRI>90
- TM21
- LM80
- CB
-
-