


# LIGHTLINE SENSITIVE

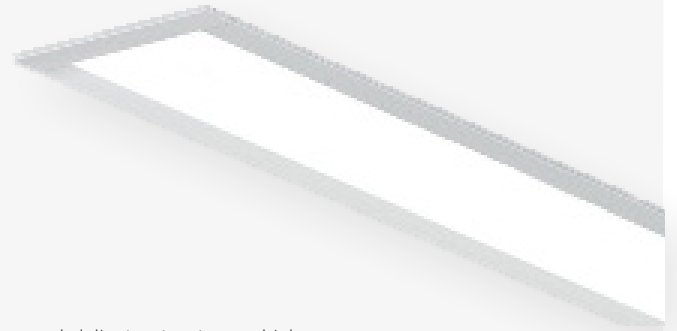


A 50x35 mm recessed lighting profile.

LightLine SENSITIVE is a powerful light fixture in a small body. It has a unique and delicate structure, which delivers low glare. The fixture's slim cut allows recessed installation in plaster and suspended ceilings.

Suitable for installation in hotels, lobbies, public buildings, restaurants, villas and more.

## Technical specifications:

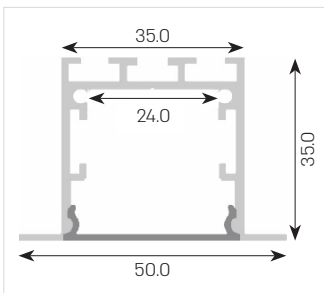

**Material:** Anodized Aluminium. Coated or Coloured by choice.

**Diffuser:** Opal / Prismatic.

**Body Color:** ● ○ ● Additional colours by special order.

**Power:** Up to 30W/m

**CCT:** 2700K / 3000K / 4000K

**Mounting Type:** Recessed.

**Max Length per Feed:** Up to 5 m' for 15W/m model.

Up to 3 m' for 30W/m model.


| Power (W) | CCT   | Width×Height (mm) | Diffuser | Luminaire's Lumen Output (lm) |
|-----------|-------|-------------------|----------|-------------------------------|
| 15        | 4000K | 50×35             | Opal     | 680                           |
| 25        | 4000K | 50×35             | Opal     | 1,125                         |
| 30        | 4000K | 50×35             | Opal     | 1,340                         |

\* Data shown is for a few of the available models. The luminaires are available in different colour temperatures, optics, lumen outputs and power. \*\* Tolerance: +-10%.

## Various Accessories and Connectors Available:



## Photometric Curves:



- 24v DC
- PF>95%
- ta= 35°C
- IP40
- UGR<19
- CRI>90
- TM21
- LM80
- CB
- III